

UB-6T Tabletop Oven

Project \_\_\_\_\_

Item \_\_\_\_\_

Quantity \_\_\_\_\_



**SIZE:**

UB-6T - 49- 3/4" High, 32- 1/4" Wide, 36- 1/8" Deep  
1264 mm High, 819 mm Wide, 918 mm Deep

NU-VU's UB-6T is a Tabletop oven with a capacity of either six 18"x26" full-size pans or twelve 13"x18" half-size pans. The unique V-AIR <sup>®</sup> design results in faster cook times and perfect heat distribution top to bottom, side-to-side and front to back. You'll never need to turn pans. Stainless steel construction provides a heavy-duty long life oven. Solid-state controls are accurate and durable. The tempered glass, flush mounted door will not sag over time. It provides a full view of product and has lift off hinges for easy cleaning.

**CONSTRUCTION:**

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and side of unit
- Heating elements accessible inside of cabinet and through top

**CONTROLS:**

- Solid state controls
- Indicator light for thermostat
- Microswitch fan motor cut-off

**STANDARD FEATURES:**

- V-AIR <sup>®</sup> technology
- Stainless steel construction
- Adjustable stainless steel legs (6")
- Full view tempered glass door
- Silicone rubber door gaskets
- Flush mount, lift off, no sag door
- Steam vent

**OPTIONAL FEATURES:**

- Internal steam
- Cook'n Hold
- Solid door
- Two speed fan
- Large vent
- Cart with panslides
- Product probe
- 3" casters
- Cart or stand with or without panslides

LABORATORY CERTIFICATION AND APPROVAL



NU-VU <sup>®</sup> UB-6T Tabletop Oven



NU-VU <sup>®</sup> Food Service Systems


www.nu-vu.com  
5600 13th Street  
Menominee, MI 49858

1-800-338-9886 Toll Free  
1-906-863-4401 Phone  
1-906-863-5889 Fax



Approval / Stamp

## UB-6T Tabletop Oven

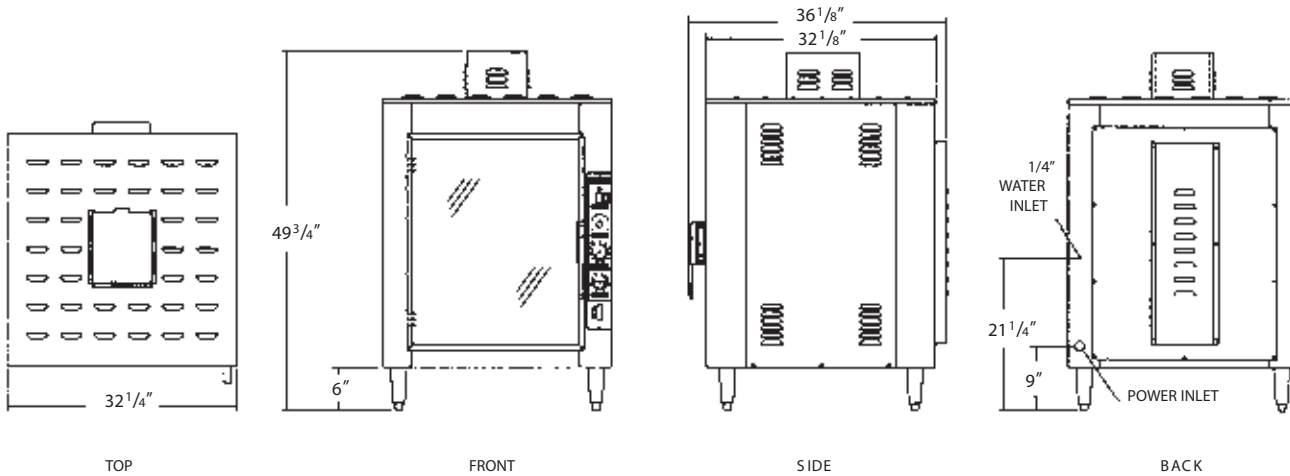

NU-VU <sup>®</sup> UB-6T Tabletop Oven

### SPECIFICATIONS:

#### ELECTRICAL:

208 or 240 Volt single or three phase is standard. (Specify at time of order.)

#### SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site. Single phase uses two wire system. Three phase uses three wire system.

#### ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
	45	35	39	31

### INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

### CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Oven	6	12	4"

### DIMENSIONS:

	Height	Width	Depth
Exterior	49- 3/4"	32- 1/4"	36- 1/8"
Interior	26- 1/4"	18- 1/4"	28- 1/2"

### WATER:

A 1/4" waterline is required if a steam option is selected. A water conditioning system should be used to minimize mineral build-up.

### LISTINGS:

The UB-6T has NSF & C-ETL-US listings.



**DOOR SWING:** Oven - 24- 1/4" (616 mm)

### PACKING SIZE:

52" High, 42" Wide, 42" Deep  
(1321 mm High, 1067 mm Wide, 1067 mm Deep)

### SHIPPING WEIGHT:

400 Pounds (181 Kg), FOB Menominee, MI 49858