

XO-1MW

Tabletop Oven with Programmable Controls



Project _____

Item _____

Quantity _____

NU-VU® XO-1MW Tabletop Oven with Programmable Controls

SIZE:

XO-1MW - 21-1/8" High, 29-1/8" Wide, 29-13/16" Deep
 mm High, mm Wide, mm Deep

NU-VU's XO-1MW tabletop ovens are designed to hold up to either five 12"x18" half size sheet pans or five 12"x20"x2-1/2" food service pans.

With exclusive circulating air and heat, they are excellent for baking and reheating all types of food products. There is never a need to turn the pans. Since the XO-1MW's don't require venting in most areas, they can be located throughout the store.

With a variety of options, the XO-1MW can be the ideal oven for a wide variety of applications.

User friendly programmable controls provide cooking parameters with just the touch of a button.

These units also feature flush mount doors, which means no sagging or leaking. Lift off hinges allows for easy cleaning.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front of unit
- Heating elements accessible inside of cabinet and through side

CONTROLS:

- Programmable controls
- Indicator light for thermostat
- Two speed fan switch

STANDARD FEATURES:

- Stainless steel construction
- Full view, dual pane, tempered glass door
- Slam Cam handle
- Programmable controls
- 4" adjustable legs
- Silicone rubber gasket on door
- Squirrel cage fan
- Two speed fan

OPTIONAL FEATURES:


- Solid door
- Internal steam
- Stacking kit
- Wire racks
- Cart or stand with or without panslides



NU-VU® Food Service Systems


www.nu-vu.com
 5600 13th Street
 Menominee, MI 49858

1-800-338-9886 Toll Free
 1-906-863-4401 Phone
 1-906-863-5889 Fax

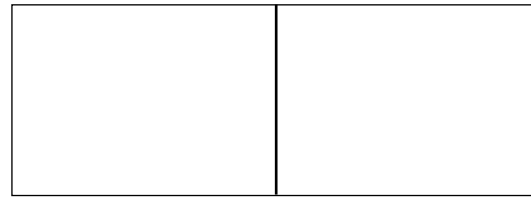

Approval / Stamp

XO-1MW Tabletop Oven with Programmable Controls

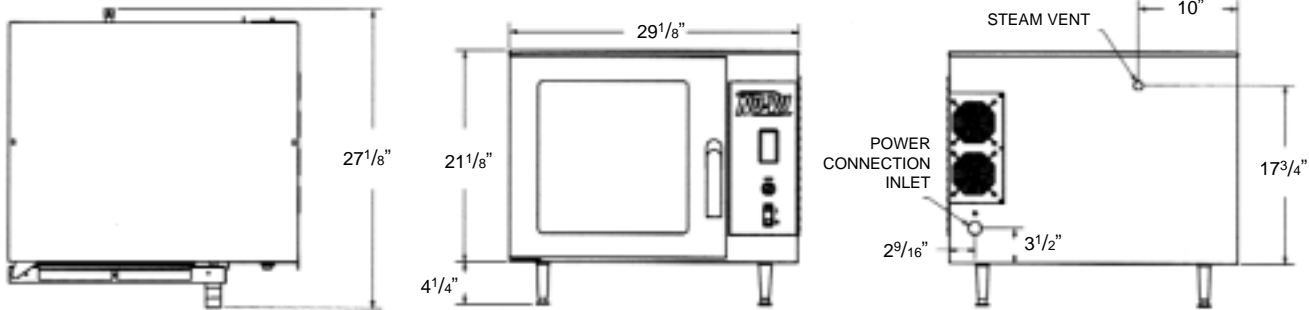

TOP

FRONT

SIDE

SPECIFICATIONS:

ELECTRICAL:

SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site.
- Single phase uses three-wire system. Three phase uses four wire system.
- 208 or 240-Volt single or three phase is standard. (Please specify at time of order.)
- One 4,000-Watt heating element is mounted in the sidewall of the oven.
- A 1/4" waterline is required if the internal steam option is selected.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
	21	20	19	17

WATER:

A 1/4" waterline is required if a steam option is selected.

INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	13"x18" Sheet Pans	12"x20"x2" Food Sheet Pans
2-7/8" Spacing	5	5
3-5/8" Spacing	4	4

DIMENSIONS:

	Height	Width	Depth
Exterior	21-1/8"	29-1/8"	29-13/16"
Interior	16-3/4"	15-3/4"	22-3/4"

DOOR SWING: Oven - 21-3/16" (mm)

PACKING SIZE:

28" High, 36" Wide, 36" Deep
(711 mm High, 914 mm Wide, 914 mm Deep)

SHIPPING WEIGHT:

180 Pounds (82 Kg), FOB Menominee, MI 49858

NU-VU® XO-1MW Tabletop Oven with Programmable Controls